


DENSO[®]-Plast Mastic

Product information

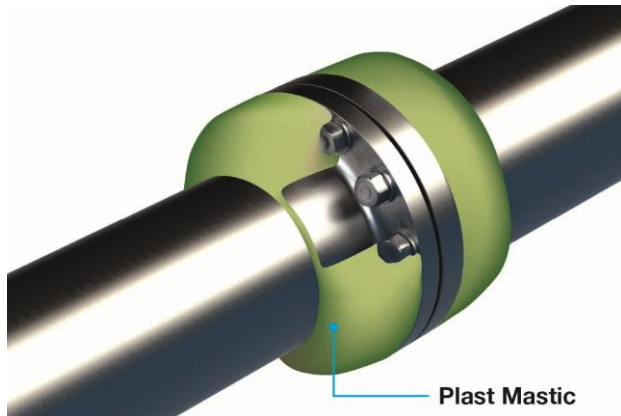

Special advantages:

- ✓ Ideal for the filling of cavities and for the surface equalization.
- ✓ Very good moldability and modeling properties.
- ✋ Simple manual processing.
- ✓ Durable corrosion prevention through petrolatum.
- ✓ Compatible with all DENSO[®] petrolatum tapes.

Mastic filler on petrolatum basis for the filling of cavities and the equalization of uneven surfaces.

For a century now, DENSO Group Germany has been representing experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany has been establishing and guaranteeing the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Description

DENSO[®]-Plast Mastic is a mastic filler on petrolatum basis for the filling of cavities as well as the equalization of uneven surfaces at buried pipeline components (e.g. flanges and armatures). DENSO[®]-Plast Mastic, due to its reinforcement with filler materials and fibers, permits a good moldability and stability.

DENSO[®]-Plast Mastic will be applied manually or with a palette-knife to the surface to be coated. For this purpose the mastic will be modeled in such a way that DENSO[®] petrolatum tape can wrap completely seated across the coated area.

DENSO[®]-Plast Mastic is compatible with all DENSO[®] petrolatum tapes, such as the corrosion prevention tape DENSO[®]-Plast. A DEPROTEC[®]-DRM PP rockshield made from robust Polypropylene nonwoven can be used as an additional mechanical protection.

Typical product properties

Property	Unit	Typical value	Test method
Color	-	Green-grey	-
Structure	+4°C (+39°F)	plastic, still formable, not brittle	-
	+23°C (+73°F)		
Saponification number	mg(KOH) / g	≤2	DIN EN 12068
Operating temperature	°C (°F)	to +50 (+122)	-
Processing temperature	°C (°F)	+4 to +30 (+39 to +86)	-

Ordering information and packaging

Delivery in plastic bucket, fill quantity 2 kg and 12 kg.

Storage

When stored in its original, unopened packaging, DENSO[®]-Plast Mastic can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +30°C (+86°F)

DENSO GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0
www.denso-group.com | info@denso-group.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.denso-group.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.